



**Know what your customers want most
and what your company does best.
Focus on where those two meet**

Kevin Stirtz

SUNDIGITAL CORPORATION

25, Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp+

ph Number: 9088389227 / 8910401811 Email:

info@sundigitalcorporation.com

Website: www.sundigitalcorporation.com



WE ALWAYS AT YOUR SERVICE

SERVICE TO OTHER LEADS TO GREATNESS


TOPICS	Page no
ABOUT US	3
CLIENT LIST	4-5
CERTIFICATIONS	6
PRODUCT CATLOUGE	7-48
HAND HELD METAL DETECTOR	7-9
DOOR FRAME METAL DETECTOR	10-13
X-RAY BAGGAGE SCANNER	14-24
BREATH ANALYSER	25-29
HAND HELD SEARCH LIGHT	30-36
TURNSTILE ,BOOM BARRIER & BODY WORN CAMERA	37-42
PRICE LIST	43-46

COMPANY PROFILE



Sundigital Corporation is an independent organization driven by passionate safety and security experts. With our 10 years from 2010 of experiences and service oriented. Professional approach, we have growth into serious and valuable clients in security industry. Sundigital Corporation distinguishes itself by developing security solutions that truly make a difference, that minimize the risk and are specific to your situation. We use carefully selected innovative products and compliment these, if necessary, with custom made components. Thus contributing to the continuity of your organisation.





CLIENT LIST	LOCATION
KOLKATA POLICE	WEST BENGAL
PARADIGM TECH SOLUTIONS	MAHARASHTRA
SHILPA STEEL & POWER LTD	MAHARASHTRA
SUBHAM SAFETY HOUSE	RAJASTHAN
GANPATI SALES CORPORATION	ODISSA
DEPARTMENT OF HEALTH & FAMILY WELFARE	JHARKHAND
APNA SECURITY SYSTEM	MUMBAI
JYOTI TRADERS	ASSAM
DHANESH INFOSEC	AHMEDABAD
NATIONAL FIRE PROTECTION ARMOUR	MAHARASHTRA
ANTONY SINGHA ROY & ASSOCIATE	BALURGHAT

AIR FORCE STATION (MINISTRY OF DEFENCE)	ASSAM
TACT SOLUTIONS	AHMEDABAD
PANTHAN COMMUNICATIONS	HYDRABAD
ROTARY INTERNATIONAL	WEST BENGAL
STATE BANK OF INDIA	WEST BENGAL
WEST BENGAL STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED	WEST BENGAL
CENTRAL INDUSTRIAL SECURITY FORCE (CISF)	CHENNAI
BSF	CHENNAI
AMRI HOSPITAL	WEST BENGAL
FORTUNA IMPEX PVT LTD	WEST BENGAL
GLOBAL STEEL TRADING	UTTAR PRADESH
MANAPPURAM FINANCE LIMITED	WEST BENGAL
NEW MODERN COOLING	WEST BENGAL
INTEGRATED COAL MINING LIMITED	WEST BENGAL
DOORDARSHAN KENDRA	MAHARASTRA

SECURITY ENGINEERS SOLUTION	WEST BENGAL
AGRICULTURAL DEPARTMENT	KARNATAKA
SPARTANS GROUP	WEST BENGAL
IIT KHARAGPUR	WEST BENGAL
GLOBSYN INNOVATOR PVT LTD	WEST BENGAL
PHUONG MI TRADING AND ENGINEERING	VIETNUM
RASTRIYA CHEMICAL AND FERTILIZERS LIMITED(RCF)	MAHARASTRA
HUSSAIN ABBAS BRO	ANDHRA PRADESH
INDORE SAFETY CORPORATION	INDORE
CENTRAL INDUSTRIAL SECURITY FORCE (CISF)	MUMBAI
RAMKRISHNA MISSION ASHRAMA (BARANAGAR)	WEST BENGAL
ADANI ELECTRICITY MUMBAI LIMITED	MUMBAI
SWIFT SECURITAS	KOLKATA
LE MERIDIEN	KOCHI
GOLDEN PLAY PVT LTD	SIKKIM
DISTRICT POLICE OFFICE	KERELA
DEPARTMENT OF BIOTECHNOLOGY GOVT OF INDIA	KALYANI ,WEST BENGAL
ENGINEERS INDIA LIMITED	GURUGRAM
DEPARTMENT OF DEFENCE	GUWAHATI
CENTRAL ARM POLICE FORCE	TAMIL NADU

CERTIFICATIONS



भारत सरकार
परमाणु उर्जा विभाग
विकिरण सुरक्षा विभाग

GOVERNMENT OF INDIA
ATOMIC ENERGY REGULATORY BOARD
RADIOLOGICAL SAFETY DIVISION

Case File Number: WB-85591-INST Date of Issue: 06/10/2020
Document Number: 20-COMSUPPAUTH-541941 Expiry Date: 06/10/2025

AUTHORISATION FOR SUPPLY OF RADIATION EQUIPMENT/SOURCE

This has reference to your application no. 20-643927 dated 26/09/2020. In exercise of the powers conferred under Section 16 and 17 as applicable of Atomic Energy Act, 1962 read in conjunction with Rule-3 of the Atomic Energy (Radiation Protection) Rules, 2004, the Atomic Energy Regulatory Board (AERB) hereby grants the **consent** in favour of **MRS. DIPALI BANDOPADHYAY, SUNDIGITAL CORPORATION, KOLKATA** hereinafter referred to as the Licensee, for supply of radiation equipment/source.

The **PROPRIETOR, SUNDIGITAL CORPORATION** and **MRS. DIPALI BANDOPADHYAY** are hereby identified as the Employer and Licensee respectively, for the purpose of assigning the responsibilities specified in the Atomic Energy (Radiation Protection) Rules, 2004.

The Employer and Licensee are responsible for,

- Ensuring compliance with the relevant provisions of the
 - Atomic Energy Act, 1962
 - Atomic Energy (Radiation Protection) Rules, 2004
 - All applicable Safety Codes, Guides and Regulatory documents issued by AERB from time to time.
 - Directives issued by Competent Authority from time to time.
- Ensuring compliance with terms and conditions stated in Annexure-I and/or Annexure-II as applicable.

Note:
This approval is issued ONLY from the RADIATION SAFETY VIEW POINT. All other clearances shall be obtained from concerned state/central/local authorities as applicable.
This approval may be suspended, modified or withdrawn as specified in the Atomic Energy (Radiation Protection) Rules, 2004, in the event of contravention of the provisions of the above Act / Rules / Codes or terms and conditions of the approval. Where deemed appropriate, AERB may also initiate penal action against the Employer/licensee in such an event. A copy of this approval shall be displayed in a prominent location in the Company premises.

Issuing Authority

Shri R. K. Singh
Head, IAS

MRS. DIPALI BANDOPADHYAY
SUNDIGITAL CORPORATION
17 DR SUBODH CHANDRA ROY SARANI NIMTA,
KOLKATA-700051,
WEST BENGAL.

Note: This document is also available at www.aerb.gov.in/elora



परमाणु उर्जा विभाग परीक्षा विभाग, मुंबई 400094 (महाराष्ट्र)
Atomic Energy Regulatory Board, Nyaymark Bhawan, Anushaktinagar, Mumbai-400094 (Maharashtra)

वेबसाइट/Website: www.aerb.gov.in टेलीफोन/Tel: 91-22-2599 0656 फैक्स/Fax: 91-22-2599 0650

SMCS SMCS SMCS SMCS SMCS SMCS SMCS



Certificate of Registration

SUNDIGITAL CORPORATION.

25, SISIR BHADURI STREET., BIRATI, KOLKATA. PIN - 700051.

Certify that the management system of the above organisation has been audited and found to be in accordance with requirements of standard detailed below.

ISO 9001:2015

(QUALITY MANAGEMENT SYSTEM)

ELECTRONIC SECURITY SYSTEMS MANUFACTURERS & TRADER.

Certificate No. : QMS1901175

This certification was conducted in accordance with the SM Certification Services auditing and certification procedures and is subject to regular surveillance audits.

Certificate Issue Date : 11th December 2019	Certificate Expiry Date : 10th December 2022
Date of Initial Registration : 11th December 2019	Re-Certification Period : 3 Years
1st Surveillance Due : 11th December 2020	2nd Surveillance Due : 11th December 2021

Further clarification regarding the scope of this certification of ISO 9001:2015 requirements may be obtained by consulting To Check the Certificate validity please refer Web : www.smcertificationservices.com




System Certification Manager
SM CERTIFICATION SERVICES
Register Under American International Accreditation Organization Registrar No. 035848-0194-18
This Certificate is valid for 3 years subject to successful surveillance audits.

Scanned with CamScanner

SMCS SMCS SMCS SMCS SMCS SMCS SMCS

PRODUCT CATLOUGE

HAND HELD METAL DETECTOR



MODEL NO SDV01



MODEL NO GC101H

PRODUCT DETAILS




Specification	Details
Alarm indication	Video LED and audio / video LED and vibration
Working current	<270 ma
Working voltage	Dc7v-9v
Dimension	410mm(L)*85mm(W)*45mm(H)
Temperature	5- 45degree c
Frequency	25KHZ
Reset time	0.5 sec
Weight	335 grm
Battery	9v

PRODUCT HIGHLIGHTS

- One switch operation – turns it on and begins using it
- Does not require only adjustment
- Rugged and robust design
- Sharp audible alarm as well as vibratory alarm available
- Two sensitivity settings high and low to allow various situations
- When battery voltage drops it does not effect detecting distance

PRODUCT DETAILS

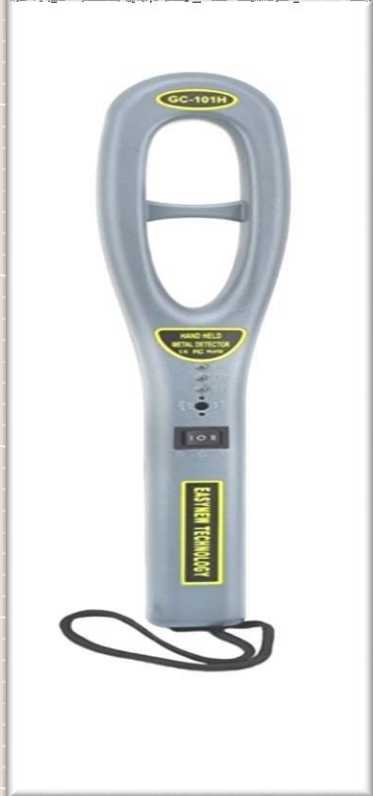

Specification	Details
Alarm indication	continuous yellow LED: detected target
Alarm signal	Sound mode Buzzer Red LED
Flashing Green LED	Starting up
Flashing Red LED	Low voltage indication
Temperature	15- 45degree c
Frequency	30KHZ
Reset time	0.5 sec
Battery	9v

PRODUCT HIGHLIGHTS

- Detect metal & non-metal
- Freely switch between alarm
- Easy to use and Handle
- Low voltage indication
- Battery replacement is convenient with charge socket

DOOR FRAME METAL DETECTOR

SINGLE ZONE (MODEL NO SD101)



SIX ZONE (MODEL NO SD 106)



EIGHTEEN ZNE (MODEL NO SD118)

SUNDIGITAL CORPORATION



25, Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp + ph
Number: 9088389227 , 8910401811
Email: info@sundigitalcorporation.com
Website: www.sundigitalcorporation.com



PRODUCT DETAILS

Specification	Details
Gross Weight	50 kg
Power Supply	230v AC
Working Temp	--20c--+55c
Working Frequency	4-8Khz
Standard Exit Size	2203(H)*860(W)*480mm(D)
Standard Entry Size	1980(H)*700(W)*400mm(D)

PRODUCT HIGHLIGHTS

- 5Digital LED count: Easy show& count
 - 8 Screw: Easy assembly and install
 - Socket: Easy connect both door panels;
 - Integrated circuit board
 - Tamper Indication
 - Foot cover
 - Infrared sensor
 - Power line: Support UK/ European/USA stnd
- SINGLE ZONE DETECTING**



PRODUCT DETAILS

Specification	Details
Gross Weight	53 kg
Power Supply	230v AC
Working Temp	--20c--+55c
Working Frequency	4-8Khz
Standard Exit Size	2203(H)*860(w)*480mm(D)
Standard Entry Size	1980(H)*700(W)*400mm(D)

PRODUCT HIGHLIGHTS

5Digital LED count: Easy show& count

8 Screw: Easy assembly and install

Socket: Easy connect both door panels;

Integrated circuit board

Tamper Indication

Foot cover

Infrared sensor

Power line:Support UK/ European/USA stnd

SIX DETECTING ZONES



PRODUCT DETAILS

Specification	Details
Gross Weight	55 kg
Power Supply	230v AC
Working Temp	--20c--+55c
Working Frequency	4-8Khz
Standard Exit Size	2203(H)*860(W)*480mm(D)
Standard Entry Size	1980(H)*700(W)*400mm(D)
Range	2 meters, 4 meters, 6 meters

PRODUCT HIGHLIGHTS

5Digital LED count: Easy show& count
8 Screw: Easy assembly and install
Socket: Easy connect both door panels;
 Integrated circuit board
 Tamper Indication
 Foot cover
 Infrared sensor
Power line: Support UK/ European/USA stnd
18 DETECTING ZONES

X-RAY BAGGAGE SCANNER

MODEL NO 5030



MODEL NO 6040



MODEL NO 6550



MODEL NO 8065



MODEL NO 10080



MODEL NO 10080



SUNDIGITAL CORPORATION




25, Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp + ph
Number: 9088389227 , 8910401811
Email: info@sundigitalcorporation.com
Website: www.sundigitalcorporation.com



PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours
- Energy saving design
- High penetration
- Good quality images
- One key turn of
- Tunnel Size 504.7*(L) 303 (W)

Dimension drawing

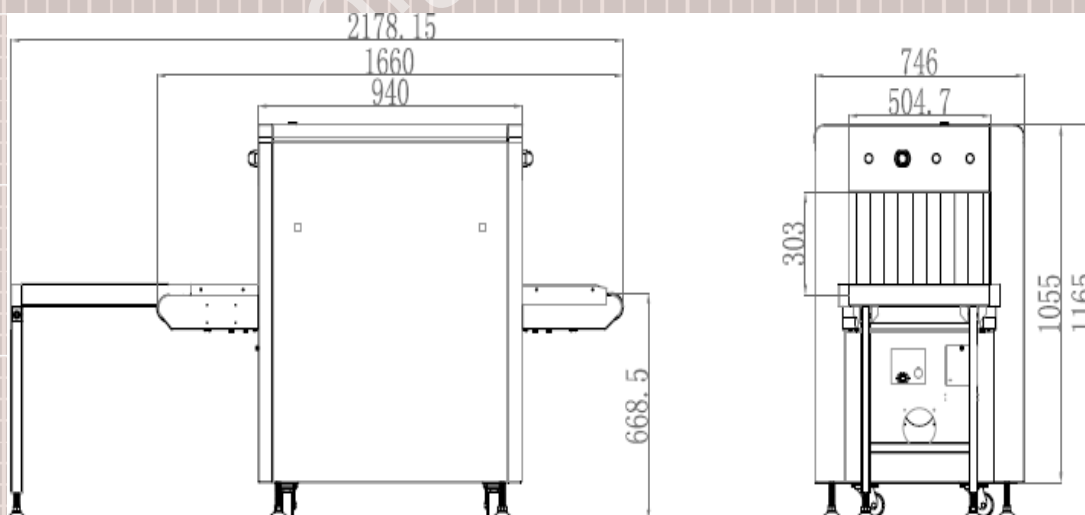

Important Sizes:

Product Size: 2178* 746 * 1165mm



Product Details

Unit Weight	260 kg
Unit Size	2178* (L) 746* (W) 1165 *(H)
Tunnel Size	504.7*(L) 303 (W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	100 (kg)
Penetration	Typical 12(mm) Steel Guarantee 10(mm) Steel
Wire Resolution	Typical AWG40, Guarantee 10(mm) Steel
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 0.8 (KVA)
SIN Ratio	< 60 (dB)
Film Safety	Guarantee ASA11SO1600 Film

Configuration

X- Ray Generation	100 (KV), Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution 1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- 1.6 times enlargement
- Color/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Color

Other Function

- => Time & Date Display
- => Power On Self Start
- => Built in Diagnostic Facility
- => Dual Direction Scanning
- => System Log
- => Stimulant Training

Image Recall

All Preceding image

LAN and Window Platform

Network Application

=> multiple remote application

Operating Environment


Temperature	0 c- 45 c
Storage Temp	40c- 70c (15%- 95%)
Operation power	220 VAC (± 10) 50 ± 3 Hz



PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours
- Energy saving design
- High penetration
- Good quality images
- One key turn of
- Tunnel Size :600*(L) 400 (W)

Dimension drawing

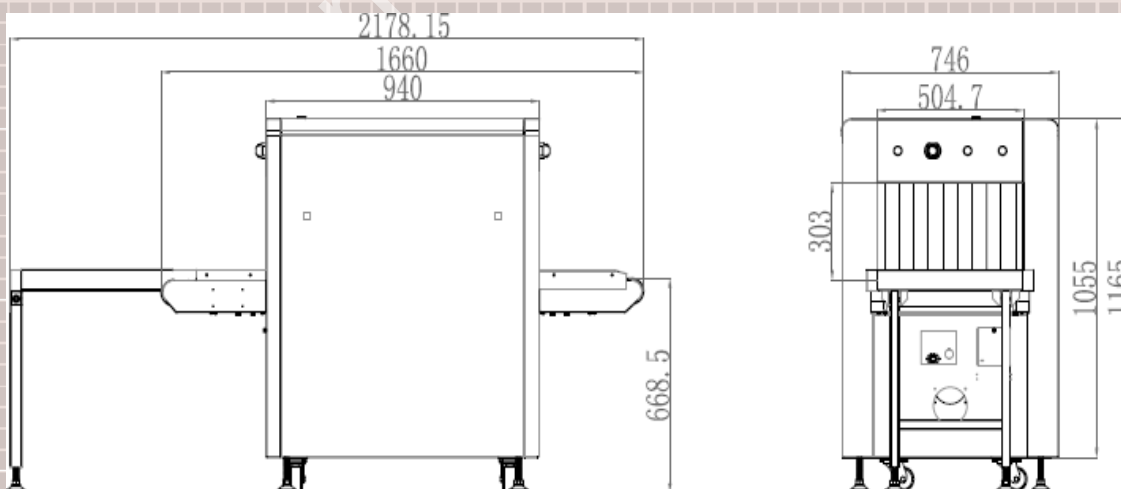

Important Sizes: Product Size: 2178* 746 * 1165mm



Product Details

Unit Weight	260 kg
Unit Size	2178* (L) 746* (W) 1165 *(H)
Tunnel Size	600*(L) 400 (W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	100 (kg)
Penetration	Typical 12(mm) Steel Guarantee 10(mm) Steel
Wire Resolution	Typical AWG40, Guarantee 10(mm) Steel
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 0.8 (KVA)
SIN Ratio	< 60 (dB)
Film Safety	Guarantee ASA11SO1600 Film

Configuration

X- Ray Generation	100 (KV), Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution 1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- 1.6 times enlargement
- Color/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Colo

Image Recall

All Preceding image

LAN and Window Platform

Other Function

- =>Time & Date Display
- => Power On Self Start
- => Built in Diagnostic Facility
- => Dual Direction Scanning
- => System Log
- r=> Stimulant Training

Network Application

=> multiple remote application

Operating Environment

Temperature	0 c- 45 c
Storage Temp	40c- 70c (15%- 95%)
Operation power	220 VAC (± 10) 50±3 Hz

X RAY BAGGAGE SCANNER


6550



PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours above
- Energy saving design
- High penetration
- Good quality images
- One key turn off
- Tunnel size -659.4*(L) 503.85(w)

Dimension drawing

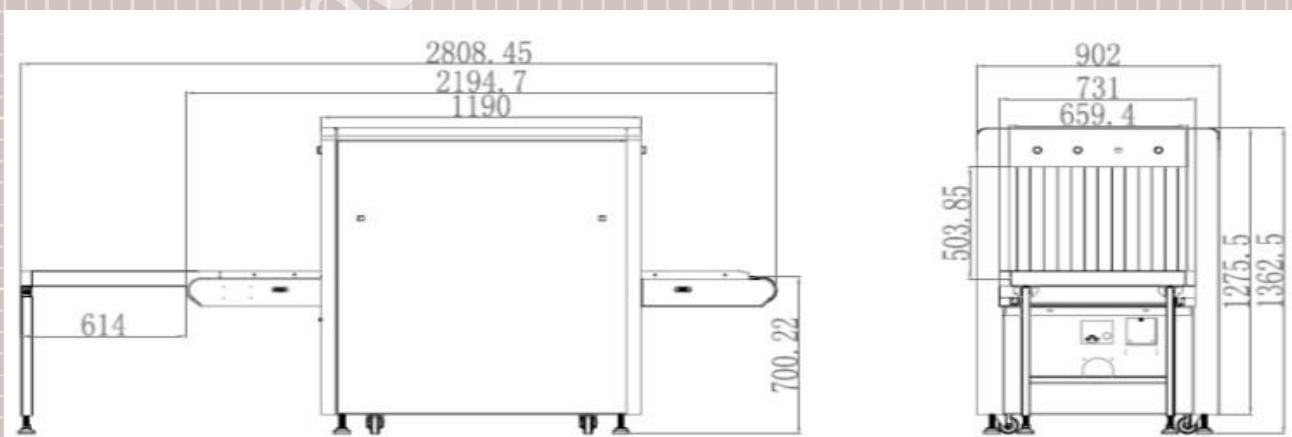

Important Size

Product Size: 2808.5* 902 * 1362.5mm (L × W × H)

Tunnel Size: 659.4* 503.85mm (width × height)



Product Details

Unit Weight	260 kg
Unit Size	2808.5* (L) 902* (W) 1362*(H)
Tunnel Size	659.4*(L) 503.85(W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	100 (kg)
Penetration	Typical 08(mm)
Wire Resolution	Typical AWG40,
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 0.5(KVA)
SIN Ratio	< 60 (db)
Film Safety	Guarantee ASA11SO1600 Film

Configuration

X- Ray Generation	100 (KV) Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution 1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- Colour/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Colour

Other Function

- => Power On Self Start
- => Built in Diagnostic Facility
- => Dual Direction Scanning
- => System Log
- => Stimulant Training
- => Time & Date Display

Image Recall

30 Preceding image

Network Application

=> multiple remote application

LAN and Window Platform

Operating Environment


Temperature	0 c- 45 c
Storage Temp	20c- 60c (15%- 95%)
Operation power	220 VAC (± 10) 50 ± 3 Hz

PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours above
- Energy saving design
- High penetration
- Good quality images
- One key turn off
- Tunnel size -807.5*(L) 653(W)



Dimension drawing

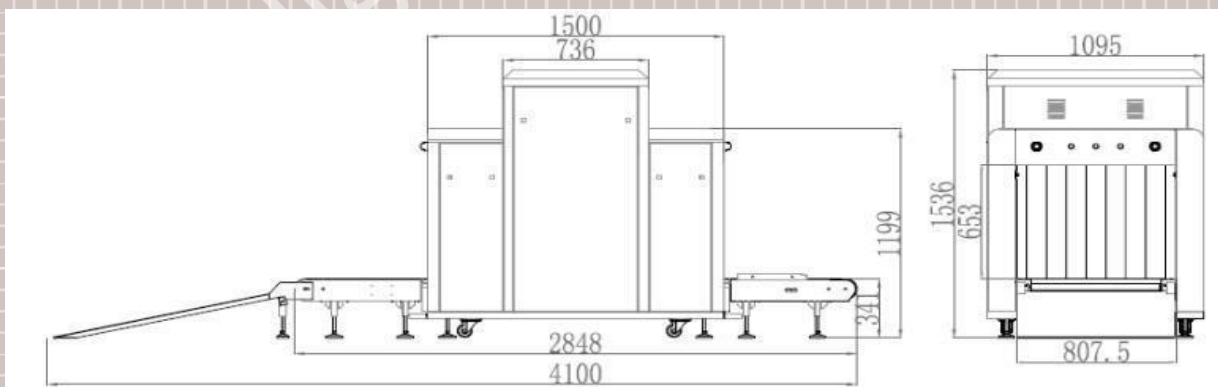

Important Sizes:

Product Size: 2848* 1095 * 1536mm (L × W × H)

Tunnel Size: 807.5* 653mm (width × height)

Product Details

Unit Weight	600 kg
Unit Size	2848* (L) 1095* (W) 1536*(H)
Tunnel Size	807.5*(L) 653(W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	200 (kg)
Penetration	Typical 12(mm)
Wire Resolution	Typical AWG36,
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 0.5(KVA)

Configuration

X- Ray Generation	100 (KV) Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution 1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- Colour/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Colour

Image Recall

30 Preceding

LAN and Window Platform

Other Function

- => Power On Self Start
- => Built in Diagnostic Facility
- => Dual Direction Scanning
- => System Log
- => Stimulant Training
- => Time & Date Display

Network Application

=> multiple remote application

Operating Environment

Temperature	0 c- 45 c
Storage Temp	20c- 60c (15%- 95%)
Operation power	220 VAC (± 10) 50±3 Hz

X RAY BAGGAGE SCANNER


10080



PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours
- Energy saving design
- High penetration
- Good quality images
- One key turn of
- Tunnel Size 1011*(L) 801(W)

Dimension drawing

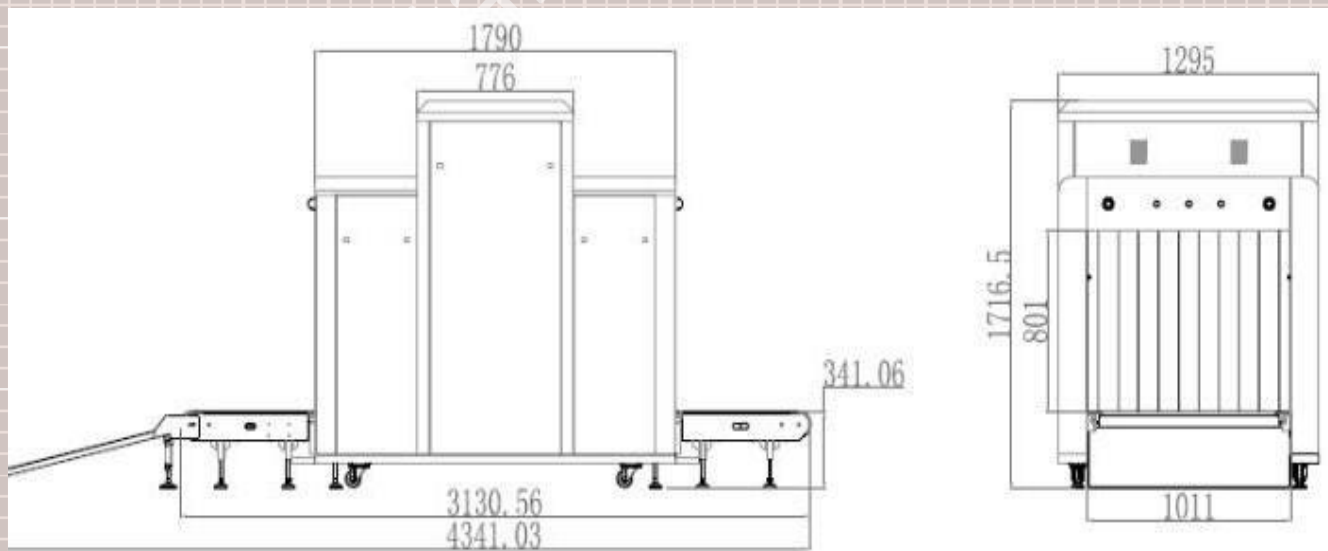

Important sizes: Tunnel size -1011*(L) 801(W)

Product size : 4341* (L) 1295* (W)1761*(H)

Product Details

Unit Weight	600 kg
Unit Size	4341* (L) 1295* (W) 1761* (H)
Tunnel Size	1011* (L) 801 (W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	100 (kg)
Penetration	Typical 12(mm)
Wire Resolution	Typical 12(mm)
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 0.5(KVA)
SIN Ratio	< 60 (db)
Film Safety	Guarantee ASA11SO1600 Film

Configuration

X- Ray Generation	100 (KV) Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution 1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- Colour/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Colour

Image Recall

30 Preceding image

Other Function

- => Power On Self Start
- => Built in Diagnostic Facility
- => Dual Direction Scanning
- => System Log
- => Stimulant Training
- => Time & Date Display

Network Application

=> multiple remote application

LAN and Window Platform

Operating Environment


Temperature	0 c- 45 c
Storage Temp	20c- 60c (15%- 95%)
Operation power	220 VAC (± 10) 50 ± 3 Hz

PRODUCT HIGHLIGHTS

- Linux operation system
- ARM CPU
- Digital signal and processor
- Continuous working 10000 hours
- Energy saving design
- High penetration
- Good quality images
- One key turn off
- Tunnel size -1011*(L) 801(W)



Dimension drawing

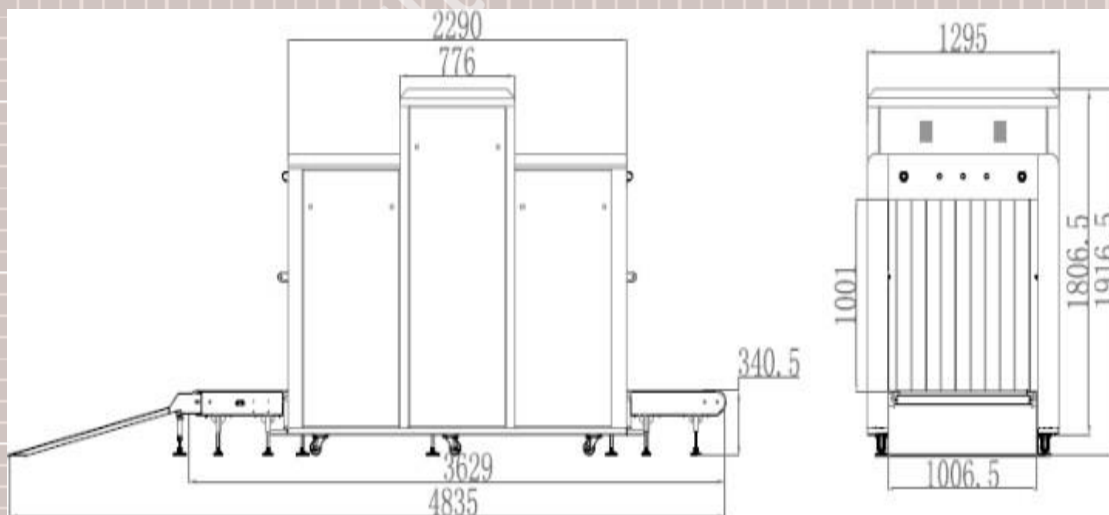

Important Sizes:

Product Size: 4835* 1295* 1916mm (L x W x H)

Product Details

Unit Size	4835* (L) 1295* (W)1916*(H)
Tunnel Size	1011*(L) 1006(W)
Conveyor Speed	0.2 (m/s)
Conveyor Height	663 (mm)
Conveyer Max load	200 (kg)
Penetration	Typical 10(mm)
Wire Resolution	Typical AWG36,
X- Ray Leakage	Less Than 0.1(MR/hr)
Power Consumption	max 1.0 (KVA)
SIN Ratio	< 60 (db)
Film Safety	Guarantee ASA11SO1600 Film

Configuration

X- Ray Generation	100 (KV) Oil Cooling from bottom to top
Compute	CPU - Cortex A9
Monitor	Dell & Acer 17" LED Resolution1280*1024 Pixel
Operation System	Linux

Software

Image Enhancement

- 1.6 times enlargement
- Color/ BW Negative
- High Low Penetration
- Organic & inorganic stripping
- General enhancement
- Pseudo Color

Other Function

- =>Time & Date Display
- =>Power On Self Start
- =>Built in Diagnostic Facility
- =>Dual Direction Scanning
- =>System Log
- => Stimulant Training

Image Recall

30 Preceding image

Network Application

- => multiple remote application
- =>LAN and Window Platform

Operating Environment

Temperature	0 c- 45 c
Storage Temp	20c- 60c (15%- 95%)
Operation power	220 VAC (± 10) 50 ± 3 Hz

BREATH ANALYSER



MODEL NO-ALCO EASY A50



MODEL NO-SD6000



MODEL NO- SD838



MODEL NO- SD616

SUNDIGITAL CORPORATION



25, Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp + ph
Number: 9088389227 ,8910401811
Email: info@sundigitalcorporation.com
Website: www.sundigitalcorporation.com



PRODUCT DETAILS

Specification	Details
Gross Weight	250gm
Measurement Time	5sec
Display	2.8inch
Accuracy	0-50kg/100ml; =5mg/100ml
Operation Temperature	-20°C to +70°C
Battery	Li-ion, 7.4V, 1300MAh
Dimension	180*70*30mm

PRODUCT HIGHLIGHTS

- Auto Mode and Manual Mode
- Up to three Decimal Places
- Air Blank Test
- Menu Operation, Easy to use
- Data Review and Print of the Device
- Memory 50,000 Measurement, USB Port
- Built-in Printer



PRODUCT DETAILS

Specification	Details
Gross Weight	200gm
Direction Range	0.00~0.20%BAC
Alarm Point	0.05%BAC 0.50%BAC 0.5mg/l
Accuracy	±10%BAC
Response time	<5sec
Operating voltage	DAC4.5V (3* AAA)
Dimension	103*65*27mm

PRODUCT HIGHLIGHTS

- Advanced flat surfaced alcohol sensor
- Quick response
- SMD assembling stable performance
- Smart MCU control
- Direct testing process LCD indication
- Digital LCD display with light blue backup
- Audio warning beyond pre-set limit
- Sensor fault self-checking



PRODUCT DETAILS

Specification	Details
Gross Weight	200gm
Direction Range	0.000~0.199%BAC
Alarm Point	0.050%BAC 0.500%BAC 0.250mg/l
Accuracy	-±0.010%BAC
Response time	<5sec
Operating voltage	2pcs AAA
Dimension	78*56*14mm

PRODUCT HIGHLIGHTS

- %-bit digital alcohol tester with audible alert
- Three kinds of unit conversion
- Quick response and resume
- Red backlight digital LCD screen
- Use mouthpiece
- Real time
- Use 2"AAA" alkaline batteries

**PRODUCT DETAILS**

Specification	Details
Gross Weight	48g
Warm up	10s
Alarm Point	0.050%BAC 0.500%BAC 0.5mg/l
Accuracy	-±0.05%BAC
Response time	<5sec
Operating voltage	2pcs AAA
Dimension	105*50*20mm

PRODUCT HIGHLIGHTS

- The breath alcohol tester can be for accurate detection of alcohol in the breath
- Advanced nm semiconductor alcohol sensor
- Quick response
- Direct testing process LCD indication
- Audio and visible warning beyond pre-set
- Battery saving design low voltage indication

HAND HELD SEARCH LIGHT

MODEL NO :SD01



MODEL NO: FAUJI30S



MODEL NO:FAUJI50S



MODEL NO:YK720



MODEL NO:YK730



MODEL NO:YK ROTATE1



SUNDIGITAL CORPORATION



25,Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp + ph

Number: 9088389227 ,8910401811

Email: info@sundigitalcorporation.com

Website: www.sundigitalcorporation.com



PRODUCT DETAILS

SPECIFICATION	DETAILS
Gross Weight	250 GRAM
LED	30Watt
Colour Temperature	-55000/7000k
Light Spot	500mt
Range	,>1000mt
Running Time	>6hrs
Front Glass	TOUGHEND
Working Voltage	DC 3.7V
Battery Rating Capacity	6.V/4.5Ah
Fixed Dimension	210/140/120mm
Power Adopter Input	Ac 110-240v
Power Adopter output voltage	8.6v/750mAh
Battery type	SMF

PRODUCT HIGHLIGHTS

- 3 Stage Dimmer
- Low Energy consumption
- No uv or IR Radiation
- Instant start
- No flickering
- Excellent heat dissipation



PRODUCT DETAILS

SPECIFICATION	DETAILS
Gross Weight	250 GRAM
LED	30Watt
Colour Temperature	-55000/7000k
Light Spot	500mt
Range	.>1000mt
Running Time	>6hrs
Front Glass	TOUGHEND
Working Voltage	DC 3.7V
Battery Rating Capacity	6.V/4.5Ah
Fixed Dimension	210/140/120mm
Power Adopter Input	Ac 110-240v
Power Adopter output voltage	8.6v/750mAh
Battery type	SMF

PRODUCT HIGHLIGHTS

- 3 Stage Dimmer
- Low Energy consumption
- No uv or IR Radiation
- Instant start
- No flickering
- Excellent heat dissipation



PRODUCT DETAILS

Specification	Details
Gross Weight	3.5 KG
Halogen blub	55W $\pm$ 5
Colour Temperature	4000
Body Material	ABS
Range	.1 km
Running Time	1.5 hrs $\pm$ 10
Front Glass	TOUGHEND
Working Voltage	DC 12V
Battery Rating Capacity	12.V/7Ah
Fixed Dimension	265/200/160mm
Power Adopter Input	Ac 110-240v
Power Adopter output voltage	14.5vv/750mAh
Battery type	SMF

PRODUCT HIGHLIGHTS

- 3 Stage Dimmer
- Low Energy consumption
- No uv or IR Radiation
- Instant start
- No flickering
- Excellent heat dissipation



PRODUCT DETAILS

Specification	Details
Gross Weight	1.6 kg
LED	20W ±5
Lumens	1600
USB output	5V 1A each*2
Running Time	13 hours
Front Glass	TOUGHEND
Working Voltage	DC 12V
Battery Rating Capacity	7.4V/7100Ah
Fixed Dimension	347/223/272mm

PRODUCT HIGHLIGHTS

- High Brightness Lumens
- Survival stand
- Long working Time
- Lithium polymer battery
- Rugged body
- Light weight



PRODUCT DETAILS

Specification	Details
Gross Weight	1.48 kg
LED	30W ±5
Lumens	2000
USB output	5V 1A each*2
Running Time	7.5 hours
Front Glass	TOUGHEND
Working Voltage	DC 12V
Battery Rating Capacity	7.4V/7100Ah
Fixed Dimension	269/222/222mm

PRODUCT HIGHLIGHTS

- High Brightness Lumens
- Survival stand
- Long working Time
- Lithium polymer battery
- Rugged body
- Light weight



PRODUCT DETAILS

Specification	Details
Gross Weight	3.93 KG
LED	50W
Color Temperature	6000k
Waterproof rating	IP67
Body color	Black, Polycarbonate
Lens Material	PC
Working Voltage	DC 12V
Beam Distance	Up to 500m
Fixed Dimension	26/20.5/18cm
Life Time Hour	50,000 hrs
Rotation	Horizontal 360 deg vertical 90 deg

PRODUCT HIGHLIGHTS

- Rotate Horizontal 360deg vertical 90deg
- Wireless remote control with left, right,up& down
- Beam Distance up to 500M
- Heavy Magnet Base for Stability
- Best Suited for Vehicle Top Operation
- Distinguished Remote for Each Light

TURSTILE GATE

PILLER TYPE TRIPOD TURNSTILE (RF BASED)



MODEL NO- SD611

BRIDGE TYPE TRIPOD TURNSTILE (RF BASED)



MODEL NO-SDA06

AUTOMATIC BOOM BARRIER



MODEL NO:SDB08(4 METERS)



MODEL NO:SDB09(6 METERS)


BODY WORN CAMERA



SUNDIGITAL CORPORATION



25,Sisir Bhaduri Street, Birati, Kolkata-700051.Whatsapp + ph
Number: 9088389227 ,8910401811
Email: info@sundigitalcorporation.com
Website: www.sundigitalcorporation.com

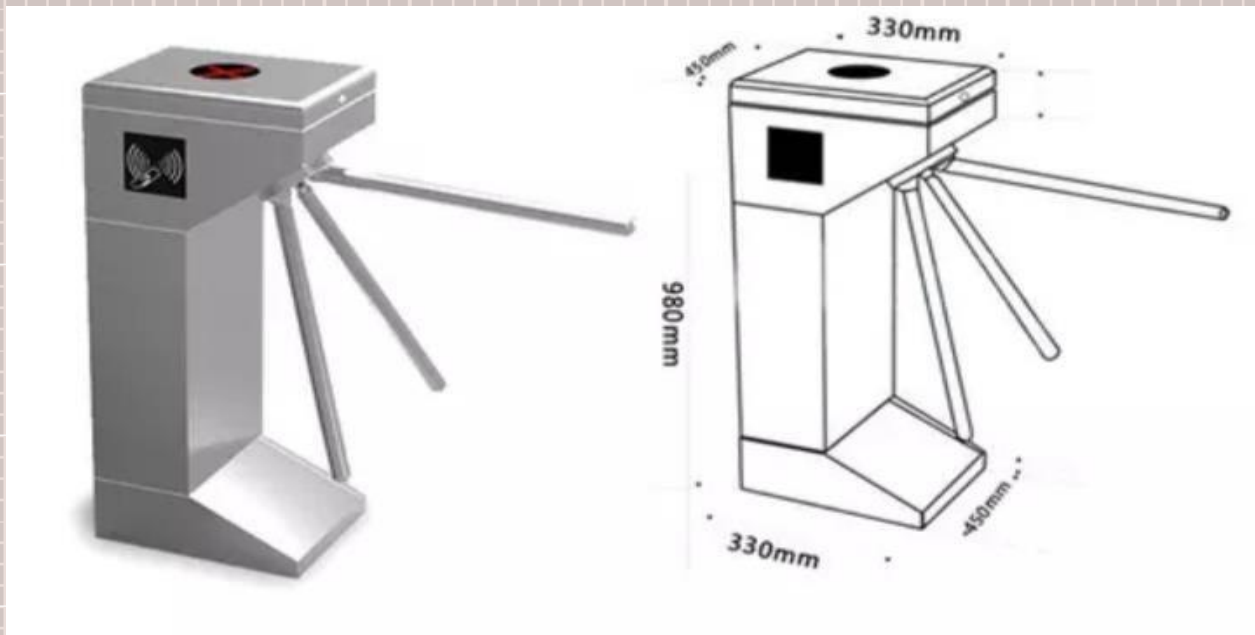

PRODUCT DETAILS

Specification	Details
PASSAGE WIDTH	510MM
Gross Weight	34kg
Power Consumption (starting)	68w
Working Temp	28degree c - 60deg c
LID material, Barrier material, cabinet material	SUS304 Stainless steel
Dimension	520(H)*310(w)* 1010mm(D)
Emergency mode	yes

PRODUCT HIGHLIGHTS

- Stainless Steel
- Bidirectional & unidirectional
- Full Automatic & Semi-automatic
- Compatible with All Access control
- Passenger Counter
- Direction and Lane LED Indicator
- Passenger count 25/min
- Suitable for Outdoor use



PRODUCT DETAILS

Specification	Details
Gross Weight	34kg
Power Consumption (starting)	68w
Working Temp	28 deg c - 60deg c
LID material, Barrier material, cabinet material	SUS304 Stainless steel
Dimension	1110(H)*280(w) *980mm(D)
Emergency mode	yes
PASSAGE WIDTH	510MM

PRODUCT HIGHLIGHTS

- Stainless Steel
- Bidirectional & unidirectional
- Full Automatic & Semi automatic
- Compatible with All Access control
- Passenger Counter
- Direction and Lane LED Indicator
- Passenger count 25/min
- Suitable for Outdoor use



PRODUCT DETAILS

Specification	Details
Gross Weight	55
Input Power	AC220V/AC110V 50/60 HZ
Rated Power	90W
Motor operating temperature	-30degc <c<80 deg c
Protection level	IP44
Height of the centre from the ground	830
Remote control distance	>30M

PRODUCT HIGHLIGHTS

- Electro Mechanical System
- Telescopic Boom
- AC Heavy Duty Motor
- Double Spring Technology
- Auto Reverse on Obstacle
- Thermal Shutdown protection

Compatible with access control



PRODUCT DETAILS

Specification	Details
Gross Weight	55
Input Power	AC220V/AC110V 50/60 HZ
Rated Power	90W
Motor operating temperature	-30degc <c<80 deg c
Protection level	IP44
Height of the centre from the ground	830
Remote control distance	>30M

PRODUCT HIGHLIGHTS

- Electro Mechanical System
- Telescopic Boom
- AC Heavy Duty Motor
- Double Spring Technology
- Auto Reverse on Obstacle
- Thermal Shutdown protection
- Compatible with access control



PRODUCT DETAILS

Specification	Details
Weight	175g
Continuous power supply time	8Hours, Full charge time <4hours
Display screen	2.0' inch Full HD LCD Display
Lens angle	Built-in camera 170 degrees
Working Temp	30°C~55°C
Storage capacity	64 GB in build, TF memory card supports up to 128 GB TF
Video format	MOV H.264 Compressed Format
Video Resolutions	2304*1296 / 1920*1080 30p / 1280*720 30p / 640*480 30p
Battery capacity:	3000mAH

PRODUCT HIGHLIGHTS

- **Video format:** MOV H.264 Compressed Format
- **Infrared night:** 6 meters to people face, 12m outline
- **Audio:** Built-in microphone speaker.
- **Power alarm:** LED flashing/vibration alarm reminder
- **Video quality:** High quality/standard / economy
- **USB**
- **HDMI**
- **FLASHLIGHT**

• METAL DETECTOR

S NO	PRODUCTS NAME	MODEL NO	PICTURE	PRICE
1	HAND HELD METAL DETECTOR	Sun digital- 101H		Ask For Price
2	HAND HELD METAL DETECTOR	Sun digital-super scanner		Ask For Price
3	SINGLE ZONE DOOR FRAME METAL DETECTOR	Sun digital-101		Ask For Price
4	SIX ZONE DOOR FRAME METAL DETECTOR	Sun digital-106		Ask For Price
5	EIGHTEEN ZONE DOOR FRAME METAL DETECTOR	Sun digital-118		Ask For Price

• X-RAY BAGGAGE SCANNER

S NO	MODEL NO	TUNNEL SIZE (L*W)	PICTURE	PRICE
1	Sundigital-5030	500*300		Ask For Price

2	Sundigital-6040	640*400		Ask For Price
3	Sundigital-6550	650*500		Ask For Price
4	Sundigital-8065	800*650		Ask For Price
5	Sundigital-10080	1100*800		Ask For Price
5	sundigital-100100	1000*1000		Ask For Price

• **ALCOHOL DETECTOR**

S NO	MODEL NO	PICTURE	PRICE
1	Sundigital-838		Ask For Price
2	sundigital-611		Ask For Price
3	sundigital-6000		Ask For Price

4	sundigital-A50		Ask For Price
---	-----------------------	--	---------------

- TURNSTILE & BOOM BARRIER

S NO	PRODUCTS NAME	MODEL NO	PICTURE	PRICE
1	PILLER TYPE TRIPOD TURNSTILE (RF BASED)	SDP06		Ask For Price
2	BRIDGE TYPE TRIPOD TURNSTILE (RF BASED)	SDA06		Ask For Price
3	AUTOMATIC BOOM BARRIER GATE (6 Meter)	SDB09		Ask For Price
4	AUTOMATIC BOOM BARRIER GATE (4 Meter)	SDB08		Ask For Price

- SEARCH LIGHT HAND HELD

S.NO	MODEL NO	PICTURE	PRICE
1	FAUJI 30S		Ask For Price
2	FAUJI 50S		Ask For Price

3	YK 720		Ask For Price
4	YK 730		Ask For Price
5	YK-ROTATE1		Ask For Price
6	SD 01		Ask For Price

OTHER PRODUCTS

S NO	PRODUCT NAME	MODEL NO	PICTURE	PRICE
1	BODY WORN CAMERA	Sundigital-A6		Ask For Price
2	UNDER VEHICLE SEARCH MIRROR	Sundigital-A10		Ask For Price
3	BATON LIGHT RECHARGEABLE RED & GREEN	Sundigital-A100		Ask For Price
4	BATON LIGHT NON-RECHARGEABLE RED & GREEN	Sundigital-A1000		Ask For Price
5	AUTOMATIC TEMPERATURE DETECTOR	Sundigital-A2		Ask For Price

Note:- GST EXTRA (18%) , DELIVERY CHARGRS EXTRA

VISIT US ON



YouTube

COMPANY WEBSITE

www.sundigitalcorporation.com



Sales
Go up and down
Service
Stays forever

THANK YOU



SUNDIGITAL CORPORATION
25, Sisir Bhaduri Street, Birati, Kolkata-700051. Whatsapp+ ph
Number: 9088389227 / 8910401811.
Email: info@sundigitalcorporation.com
Website: www.sundigitalcorporation.com